

IP 65 Front Frame



DESCRIPTION

The ADP - 19 features an excellent viewing ability for monitoring and control applications.

It is available with resistive touch screen that is easy to use and maintain.


The front panel of the display monitor is sealed with gasket for NEMA 4/IP 65 rating when it is panel-mounted in a NEMA rated cabinet or enclosure.

FEATURES

- 19" SVGA color TFT LCD display
- Heavy duty steel chassis
- Steel front panel is IP65-certified.
- OSD on the front side (OSD Back side optional)
- Analog resistive touch screen (optional)
- Analog RGB signal direct input offering
- multi-scan function

ADP-19

Dimension

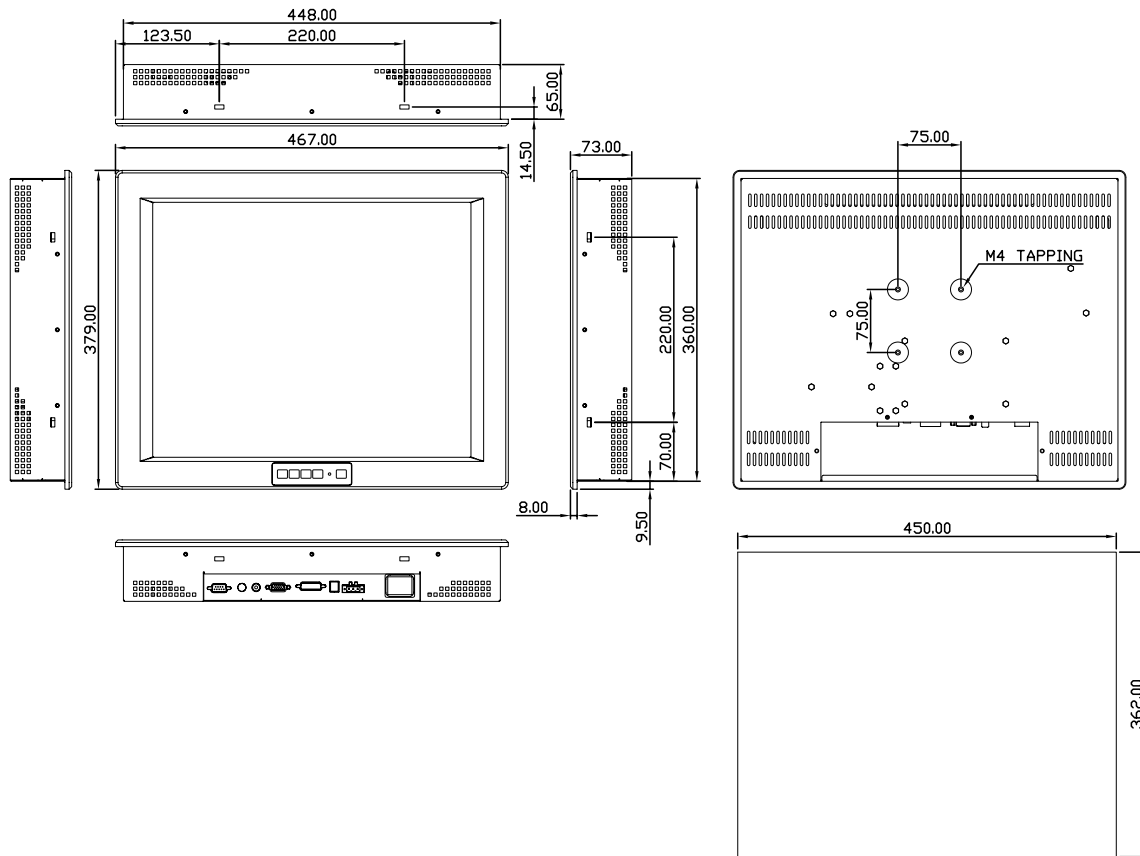

Display Specifications

Display	19" Color Active TFT Flat Panel Display
Luminance	300 cd/m ²
Viewing Angle	160(H)/160(V)
Resolution	1280x1024 (native mode), 16.2M colors
Backlight	50,000 hours
Touch Screen Description	Resistive Antiglare (optional) Automatic Screen, Setup (OSD), Brightness, Contrast, Horizontal/Vertical Position, Image Lock, Color Balance, Video Information, Power On and Sync detected
OSD Controls/Indicators	
Internal Power Adapter	AC 100~240V input Optional DC 11~32V input
I/O Connectors	1xAC power input, 1xVGA, optional:DVI,S-Video,RCA

Mechanical Specifications

Construction	Steel chassis & aluminum front panel
Dimensions	484 (W) x 400 (H) x 73 mm(D)
Dimensions Cutout (W x H)	450(W) x 362mm(H)
Weight	8,53 kgs
Mounting Options	Panel/VESA Mount

Environment Specifications

Operating Temperature	0~50°C (32~122°F)
Storage Temperature	-20~60°C (-4~140°F)
Relative Humidity	10~90% @40°C Non-condensing, without touch screen
Vibration	1G peak, 5~500 Hz (Random)
Shock	15G peak acceleration (11 msec. duration)
Ratings	NEMA 4/IP65
Certifications	CE/FCC Class A