

# BPC-200-E3300

Fanless BOXed Chassis System with Intel® Celeron® / Atom™ Processor

Small, Low Voltage and Powerful



## Features

- Ultra Low Power and Fanless Design
- VGA/ HDMI output supported
- Optional Wi-Fi Connection supported
- Rugged Design for Shock/Vibration Protection
- Easy Installation/Maintenance

## System

CPU	Soldered onboard Intel® Celeron® J1900 quad-core 2.0 GHz
Memory	1 x 204-pin DDR3L SO-DIMM socket, supporting 1600MHz SDRAM up to 8GB Optional pre-install 2GB/4GB DDR3L SO-DIMM Memory Module
Graphics	Integrated Intel® HD Graphic
LAN Chipset	2 x Realtek RTL8111E PCIe GbE controllers
Watchdog Timer	1~255 levels reset

## I/O

Serial Port	1 x DB-9 male connector for RS-232
USB Port	1 x USB 3.0 port 3 x USB 2.0 ports
LAN	2 x RJ-45 ports for GbE
Video Port	1 x DB15 female connector for Analog RGB 1 x HDMI port
Audio	1 x Phone jack connector for Line-out
Expansion Bus	1 x Mini-card socket (Half Size)

## Environmental

Operating Temp.	-20 ~ 55°C ( -4 ~ 131°F), ambient w/ air flow
Storage Temp.	-40 ~ 85°C (-40 ~ 185°F)
Operating Humidity	10 ~ 95% @ 60°C (non-condensing)
Vibration	3 Grms/5~500Hz/random operation
Shock	Operating 40G (11ms), Non-operating 60G with mSATA

## Qualification

Certification	CE, FCC
---------------	---------

## Power Requirement

Power Input	DC 12V input
Power Consumption	1.04A@12V (typical w/ J1900)

## Storage

Storage	1 x mSATA socket, Optional pre-install 64GB/32GB mSATA SSD
---------	--

## Mechanical

Construction	Aluminum alloy
Weight	0.6kg (1.32lb, Barebone)
Dimensions (W x D x H)	163 x 109 x 39 mm (6.41" x 4.29" x 1.54")

## OS Support

Windows 7 32-bit/64-bit	Windows 10 32-bit/64-bit
Windows 8.1 32-bit/64-bit	
Linux: Ubuntu	

## Qualification

Certification	CE, FCC
Warranty	2 Years, Lifecycle at least 5 Years




Alptech Elektronik GmbH



Westerbachstr. 3 Tel: 06173-325950 E-Mail: info@alptech.de  
D-61476 Kronberg/Ts. Fax: 06173-325957 www.alptech.de

## Dimensions

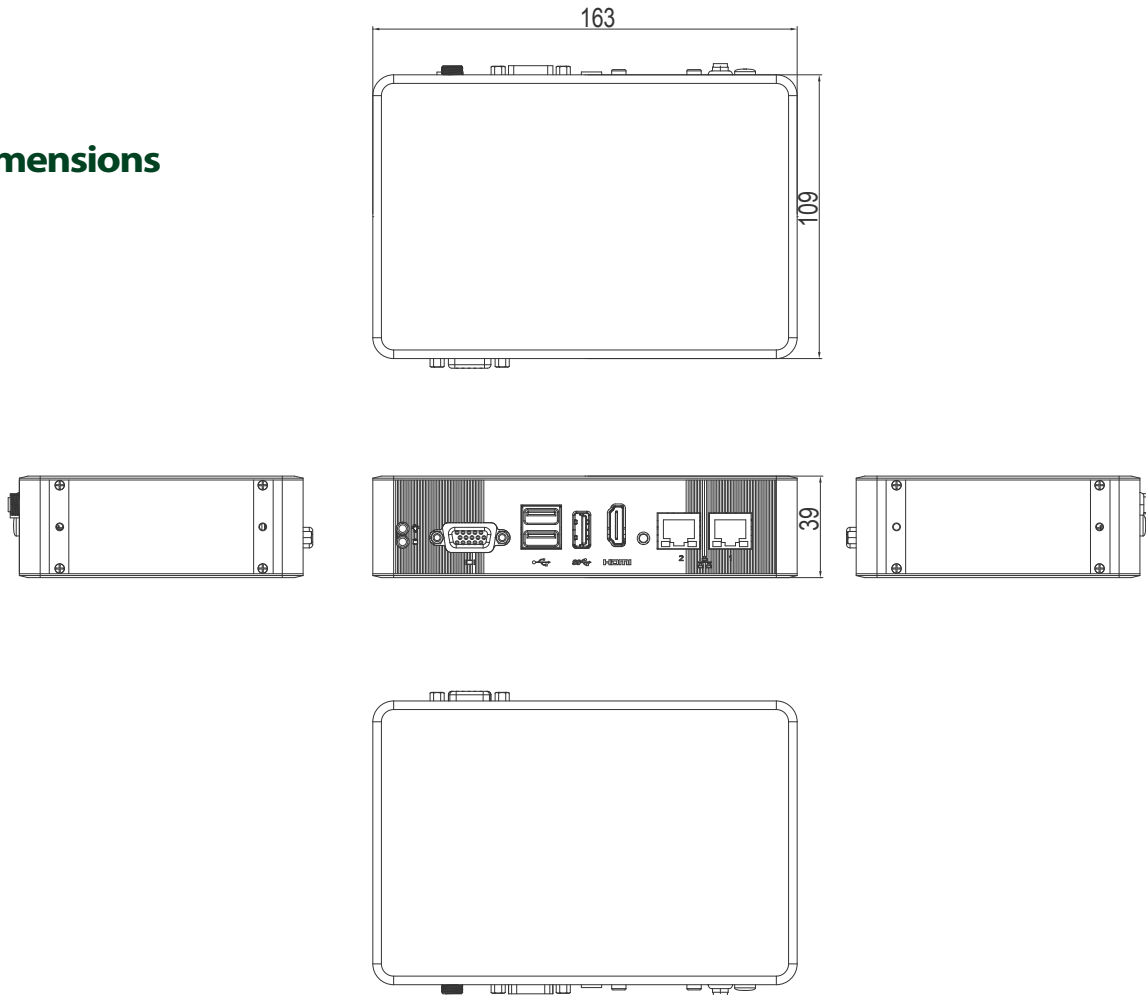

### Standard Accessories

Power Adaptor 12VDC, 5A, 60W, 2.5φ JACK, AC/DC Adaptor with power cord




WMK-3300 Wall mount kit



### Optional Accessories

VMK-3300 VESA mount kit



### Optional Configuration (CTOS\* Kit)

WiFi-AT2200 Atheros AR9462 Wi-Fi module w/ 15cm internal wiring



ANT-D11 1 x Wi-Fi Dual-band 2.4G/5G antenna



2GB SO-DIMM DDR3L-1600 2GB SO-DIMM Memory module

4GB SO-DIMM DDR3L-1600 4GB SO-DIMM Memory module



8GB SO-DIMM DDR3L-1600 8GB SO-DIMM Memory module

16GB SSD mSATA MLC 16GB

32GB SSD mSATA MLC 32GB



\*CTOS means Configure-to-Order Service.