


IMB-151

Mini-ITX Motherboard

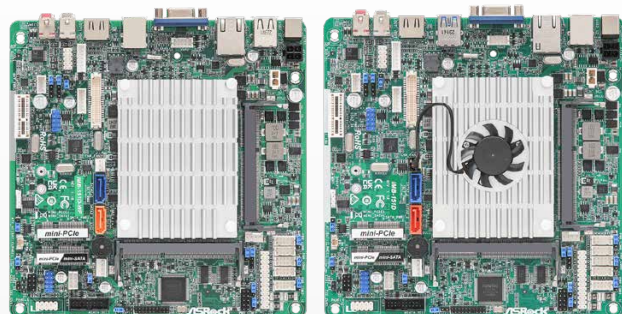

IMB-151D-WF

IMB-151D



Key Features

- Intel® Baytrail SoC Processor
 - IMB-151D (J1900)
 - IMB-151D-WF (J1900)
 - IMB-151N (N2930)
- Supports Dual Channel DDR3L SO-DIMM 1333MHz, up to 8GB
- 1 x HDMI, 1 x VGA, 1 x LVDS
- 4 x USB3.0 & 6 x USB2.0 & 2 x SATA2
- 1 x Mini-PCle, 1 x PCIe x1, 1 x mSATA
- 1 x Realtek LAN
- 1 x TPM Header
- 12~19 V DC-in

Specifications

Processor System	
Dimensions	Mini-ITX (6.7-in x 6.7-in)
CPU	Intel® Baytrail SoC Processor -IMB-151D (J1900, QC, 2.00 GHz, 10 W) -IMB-151D-WF (J1900, QC, 2.00 GHz, 10 W) -IMB-151N (N2930, QC, 1.83 GHz, 7.5 W)
Chipset	SoC
Expansion Slot	
PCIe	1 x PCIe x1
Mini-PCle	1 x half size with PCIe x1 and USB 2.0
M.2	N/A
mini-PCle/ mSATA	1 x full size with PCIe x1, SATA2 and USB 2.0
Memory	
Technology	Dual Channel DDR3L 1333 MHz
Max	8GB
Socket	2 x SO-DIMM
Graphics	
Controller	Intel® Gen7 Intel Graphics DX 11*, OGL3.2
VGA	Supports max resolution up to 1920 x 1200
LVDS	Supports max resolution up to 1920 x 1200@60Hz
eDP	N/A
HDMI	Supports max resolution up to 1920 x 1200
DVI	N/A
DisplayPort	N/A
Multi Display	Dual Display
Ethernet	
Interface	10/100/1000 Mbps
Controller	1 x Realtek

Rear I/O	
VGA	1
DVI	N/A
HDMI	1
DisplayPort	N/A
Ethernet	1
USB	2 x USB 3.0, 2 x USB 2.0
Audio Jack	2 (Mic-in, Line-out)
Serial	N/A
PS/2	N/A
Internal Connector	
USB	2 x USB 3.0, 4 x USB 2.0
LVDS	1
eDP	N/A
VGA	1
Serial	4 x COM (RS-232), 1 x COM (RS-232/422/485)
SATA	2 x SATA2
Parallel	1
GPIO	4 x GPI + 4 x GPO
SATA PWR Output Con	1
Speaker Header	1
TPM	1 x Header
Watchdog Timer	
Output	From Super I/O to drag RESETCON#
Interval	256 segments, 0,1,2...255sec
Power Requirements	
Input PWR	12~19V DC-In (4-pin ATX PWR Con)
Power On	AT/ATX Supported AT: Directly PWR on as Power input ready ATX: Press Button to PWR on after Power input ready
Environment	
Operating Temperature	0°C – 60°C
Storage Temperature	-40°C – 85°C