


MS-98H9 V2.0

ATX with 7th/6th Gen Intel® Core™ i7/i5/ i3 Pentium®/Celeron® Processor & Intel® Q170 for High-Performance Solution

NEW

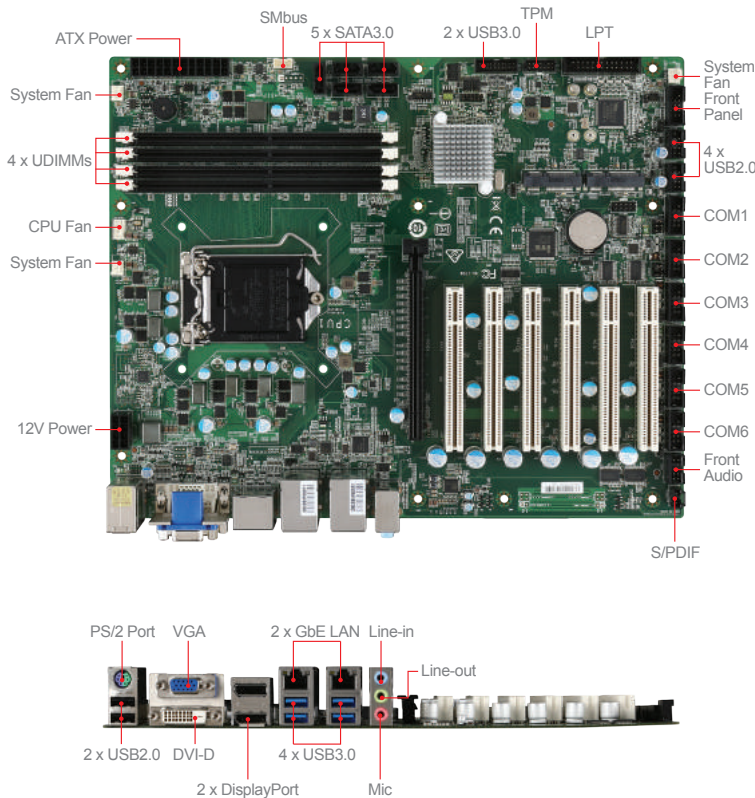

Features

- Intel® Kaby Lake-S/Skylake-S Series CPU to maximize performance
- 4 DDR4 2133MHz UDIMMs slots up to 64 GB memory
- Supports DisplayPort, DVI-D, dual Intel® GbE LAN and AMT 11.0
- Supports 6 COM ports, 5 SATA 3.0, 1 mSATA, 6 USB 3.0 and 6 USB 2.0 for flexible applications
- Supports 1 PCIe x 16 and 6 PCI Slots

Ordering Information

Part Number	Description
919-98H9-006	MS-98H9 20 OPT:A LGA1151,Q170,4*D-DR4,1*DVI-D+1*VGA+2*DisplayPort 1.2a+6*USB3.0+6*USB2.0+5*SATA3.0+1*mSATA+6*COM+1*PCIe+6*PCI+2*GBE LAN+ATX POWER

Packing List

Part Number	Description	Quantity
K1B-3008012-E06	USB Cable, 330mm	1
K14-1018004-V03	COM Port Cable, 510mm	1
K39-3002004-E06	PS/2 Y-Cable, 190mm	1
K18-1025011-V03	LPT Cable, 300mm	1
K1D-1008261-V03	SATA Cable, 500mm	2
E21-98H9010-C22	I/O SHIELDING	1
G71-SEDC148-N56/X03	Driver CD	1

Specifications

Processor	CPU	7th/6th Gen Intel® Desktop Kaby Lake/ Skylake i7/i5/i3/Pentium®/ Celeron® Series Processor, Max 95W
	Frequency	2.6GHz~4.5GHz(Depends on CPU)
	L2 Cache	2MB~8MB (Depends on CPU)
	CPU Type	Socket (LGA 1151)
	Chipset	Intel® Q170 Express
Memory	BIOS	AMI UEFI
	Technology	Dual-channel DDR4 (non-ECC) 2133MHz
	Max. Capacity	Up to 64GB
	Socket	4 x 288-pin UDIMMs
	Controller	Intel® HD Graphics
Display	Graphic Memory	Shared system memory up to 1.7 GB SDRAM
	LVDS	N/A
	eDP	N/A
	VGA	1 (Non Hot Plug)
	DVI	1 (DVI-D)
	HDMI	N/A
	DisplayPort	2
Ethernet	Multiple Display	3 independent displays
	Display Interface	VGA up to 1920 x 1080 @60Hz DVI-D up to 1920 x 1200 @60Hz DP up to 4096 x 2304 @60Hz
Ethernet	Controller	1 x Intel® I219-LM GbE LAN PHY 1 x Intel® I210-AT GbE LAN
Audio	Controller	Realtek® ALC887 HD Audio Codec
Super I/O	Controller	Fintek F81866AD-I
H/W Monitor	Watchdog Timer	256-level Watchdog Timer
	Smart Fan	Yes
TPM	Controller	Box header
I/O Interface	USB	6 x USB 2.0 (2 x rear; 4 x internal) 6 x USB 3.0 (4 x rear; 2 x internal)
	Serial	6 x COM ports (internal) COM1~2: RS-232/422/485, 0V/5V/12V COM3~6: RS-232, 0V/5V/12V
	Parallel	Yes
	PS/2	1 x PS/2 port by Y-cable for keyboard and mouse
Expansion Slot	GPIO	8-bits (4 x GPI; 4 x GPO), 5V
	PCIe x16	1
	PCIe x4	N/A
	PCIe x1	N/A
	PCI	6
	M.2	N/A
	Mini-PCIe	2 x Full-size (one w/ mSATA)
Storage	SATA	5 x SATA 3.0 (Support RAID 0/1/5/10)
	IDE	N/A
	eSATA	N/A
	CFast	N/A
	mSATA	1
Power Supply	CompactFlash	N/A
	DC	N/A
Environment	ATX	ATX-Power 24P, 12V-8P
	Operating Temperature	-10 ~ 60°C
	Operating Humidity	10 ~ 90%, non-condensing
Form Factor	Storage Temperature	-20 ~ 80°C
	Storage Humidity	10 ~ 90%, non-condensing
Certification	Dimensions	305 x 244mm (ATX)
	Weight	0.70 kg
Software Platform	EMC	FCC, CE, RCM, VCCI, BSMI (Class B)
	OS Support	Windows 10 (64-bit) Windows 7 (32/64-bit) (Intel® Skylake-S Series CPU Only) Windows 8.1 (64-bit) (Intel® Skylake-S Series CPU Only) Linux Fedora 23 (by request) Linux Ubuntu 16.04 (by request)

Semi-rugged Terminal
POS System
HMI Panel PC
Embedded System
Embedded Board
COM Express Board
Oseven Board
Pico-ITX Board
3.5" Board
EPIC Board
PICMG 1.0 Board
Mini-ITX Board
Micro-ATX Board
ATX Board
Mini-PCle Module