


P-W722DS



Computer für Industrie

Fanless 22" Wide Screen Modulized Digital Signage PC with Intel Celeron J1900 Quad CPU

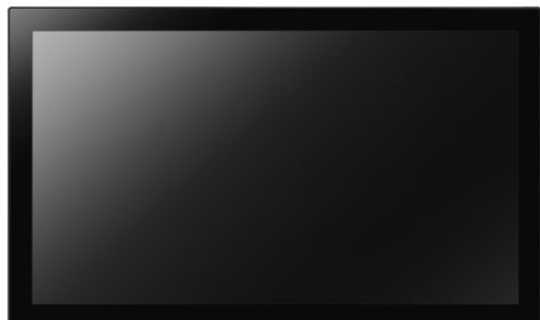

Features

- 22" 1920 x 1080 FHD LCD Display w/ LED Backlight
- Flat panel with projected capacitive Multi touch, 10 points
- Anti-scratch surface: 7H hardness
- Serial Ports
- Mini PCIe expansion slot support
- Fanless cooling system
- Web Cam
- Low power consumption
- SMA Antenna Holes for Optional WiFi Function

System

CPU	Intel® J1900, Quad Core 2.0 GHz, 2MB Cache
Memory	4GB DDR3L SO-DIMM RAM module installed 1 x DDR3L SO-DIMM Socket, supporting 1066/1333 MHz SDRAM up to 8GB
LAN	2xRealtek RTL-8111E GbE controllers
Watchdog Timer	1~255 levels reset

Storage

1st Device	mSATA 32 / 64 / 128GB SSD
	1 x Mini Card Slot

Audio

Speaker	2 x 2W speakers (optional)
---------	----------------------------

LCD Display

Size/Type	22" TFT LCD Panel
-----------	-------------------

Max. Resolution	1920 x 1080, FHD
-----------------	------------------

Max. Colors	16.2M
-------------	-------

Luminance	250 cd/m ²
-----------	-----------------------

Touch Screen	Projected capacitive touch panel, 10 points Multi
--------------	---

View Angle (U/D/R/L)	85°/85°/80°/80°
----------------------	-----------------

Power System

Power Input	Monitor 110-230/ Box PC DC 12V
-------------	--------------------------------

Certification

EMC / EMI	CE, FCC Class A
-----------	-----------------

Expansion

Expansion Bus	1 x Mini-card socket
---------------	----------------------

External I/O

Serial Ports	1 x RS232
USB Ports	1 x Type-A USB 3.0 ports 3 x Type-A USB 2.0 port
LAN	2 x RJ-45 GbE ports
Video	1 x VGA, 1x HDMI connector
WiFi	1 x SMA antenna holes for optional WiFi function

Mechanical


Mounting Type	VESA-100 Mounting
Chassis	PC Alumium, aluminum front bezel, Plastic
Dimension (W x D x H)	523 x 60 x 316 mm
Weight (Net)	9 kg

Environmental

Operating Temp.	0°C ~ 50°C
Storage Temp.	-30°C ~ 70°C (-22°F ~ 158°F)
Operating Humidity	10 ~ 95% RH @ 60°C (non-condensing)
Vibration	5 ~ 500Hz, 2Grms Random (with CFast/SSD)
Shock	Operating 10G, 11ms Non-operating 30G, 11ms (with CFast/SSD)

OS Support

Win7/ Win8 / Win10 / Linux: Ubuntu

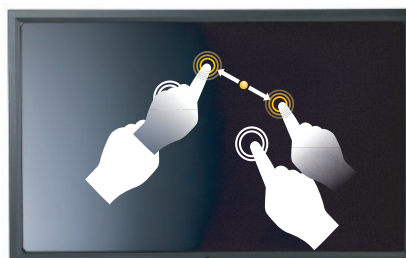

Alptech Elektronik GmbH



Zimmersmühlenweg 14-18 Tel: 06171-9799110 E-Mail: info@alptech.de

D-61440 Oberursel/Ts. Fax: 06171-9799115 www.alptech.de

Dimensions

