

P-W727DS



Computer für Industrie

Fanless 27" Wide Screen Modulized Digital Signage PC with Intel Celeron J1900 Quad CPU

LED


Features

- 27" 1920 x 1080 FHD LCD Display w/ LED Backlight
- Flat panel with projected capacitive Multi touch, 10 points
- Anti-scratch surface: 7H hardness
- Serial Ports
- Mini PCIe expansion slot support
- Fanless cooling system
- Web Cam
- Low power consumption
- SMA Antenna Holes for Optional WiFi Function



System	
CPU	Intel® J1900, Quad Core upto 2,0 GHz, 2MB Cache 4GB DDR3L SO-DIMM RAM module installed
Memory	1 x DDR3L SO-DIMM Socket, supporting 1066/1333 MHz SDRAM up to 8GB
LAN	2xRealtek RTL-8111E GbE controllers
Watchdog Timer	1~255 levels reset
Storage	
1st Device	mSATA 32 / 64 / 128GB SSD 1 x Mini Card Slot
Audio	
Speaker	2 x 2W speakers (optional)
LCD Display	
Size/Type	27" TFT LCD Panel
Max. Resolution	1920 x 1080, FHD
Max. Colors	16.2M
Luminance	300 cd/m ²
Touch Screen	Projected capacitive touch panel, 10 points Multi
View Angle (U/D/R/L)	89°/89°/89°/89°
Power System	
Power Input	Monitor 110-230/ Box PC DC 12V
Certification	
EMC / EMI	CE, FCC Class A
Expansion	
Expansion Bus	1 x Mini-card socket

External I/O	
Serial Ports	1 x RS232
USB Ports	1 x Type-A USB 3.0 ports 3 x Type-A USB 2.0 port
LAN	2 x RJ-45 GbE ports
Video	1 x VGA, 1x HDMI connector
WiFi	1 x SMA antenna holes for optional WiFi function
Mechanical	
Mounting Type	VESA-100 Mounting
Chassis	PC Alumium, aluminum front bezel, Plastic
Dimension (W x D x H)	660 x 60 x 409 mm
Weight (Net)	12 kg
Environmental	
Operating Temp.	0°C ~ 50°C
Storage Temp.	-30°C ~ 70°C (-22°F ~ 158°F)
Operating Humidity	10 ~ 95% RH @ 60°C (non-condensing)
Vibration	5 ~ 500Hz, 2Grms Random (with CFast/SSD)
Shock	Operating 10G, 11ms Non-operating 30G, 11ms (with CFast/SSD)
OS Support	
Win7/ Win8 / Win10 / Linux: Ubuntu	

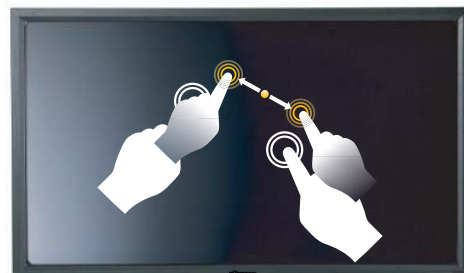

E-Mail: info@alptech.de
www.alptech.de

Alptech Elektronik GmbH

Dimensions

