

Display Monitors



RPAD-615 19" 6U Rackmount

IP 65 Front Frame 15" Color TFT Industrial Display Monitor

DESCRIPTION

The RPAD-615 19" 6U Rackmount features an excellent viewing ability for monitoring and control applications.


It is available with resistive touch screen that is easy to use and maintain.

The front panel of the display monitor is sealed with gasket for NEMA 4/IP 65 rating when it is panel-mounted in a NEMA rated cabinet or enclosure.

FEATURES

- 15" TFT XGA LCD
- 1024(H)x768(V), 300 cd/m²
- Front panel NEMA 4/IP 65 rating
- 19" Rackmount Type
- Resistive or GFG Touch screen (optional)
- DVI, Video or S-Video input (optional)

Dimensions

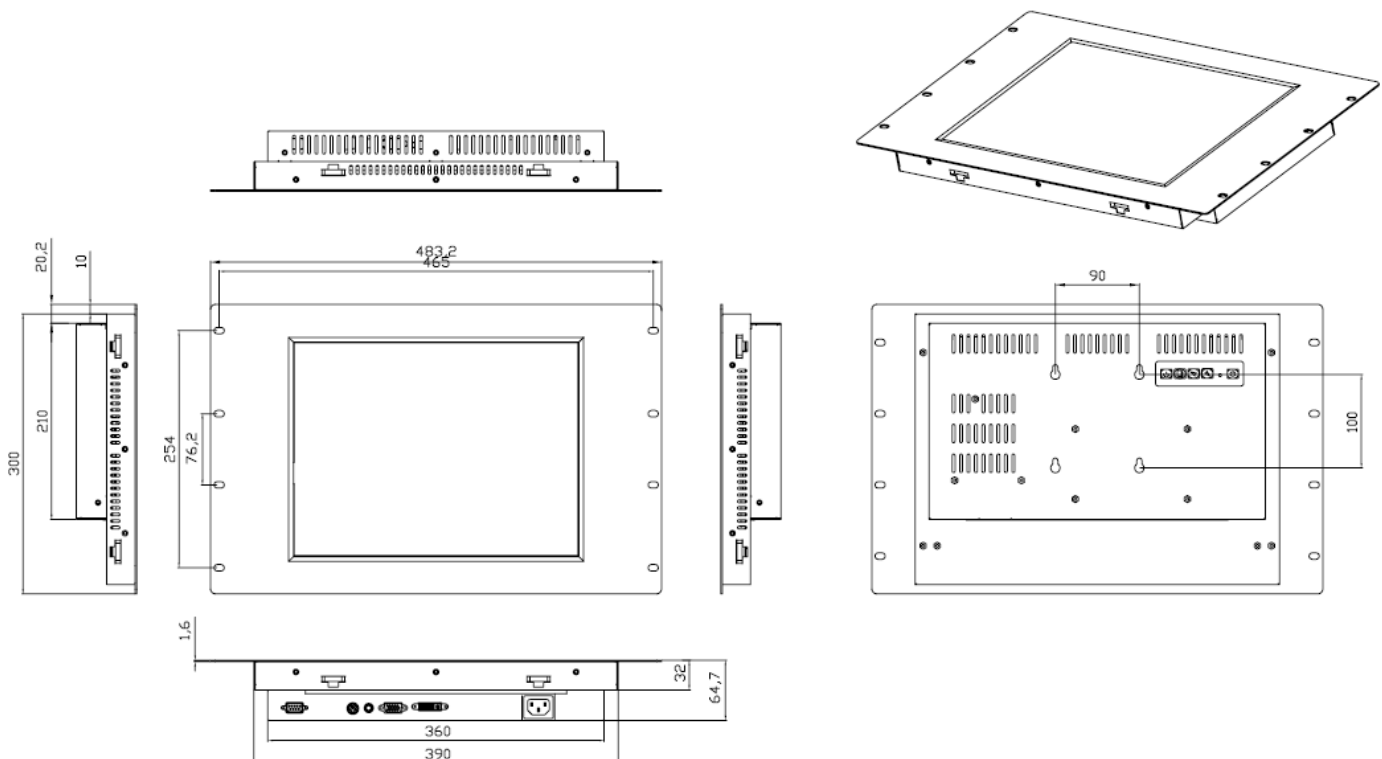

Zimmersmühlenweg 14-18 Tel: 06171-9799110 E-Mail: info@alptech.de

D-61440 Oberursel/Ts. Fax: 06171-9799115 www.alptech.de

RPAD-615 19" 6U Rackmount



Display Specifications	
Display	15" Color Active TFT Flat Panel Display
Luminance	300 cd/m ²
Viewing Angle	140/125 degrees (H/V)
Resolutions	1024 x 768 (native mode), 16.2M colors
Backlight Life	50,000 hrs
Touch Screen (optional)	Resistive or GFG Touch
OSD Controls/Indicators	Automatic Screen, Setup (OSD), Brightness, Contrast, Horizontal/Vertical Position Image Lock, Color Balance, Video Information, Power On and Sync Detection
Power Input	AC 100V~240V
Mechanical Specifications	
Construction	Steel chassis & Rackmount front panel
Dimensions	483 (W) x 266 (H) x 64.7 (D) mm
Dimensions Cutout (W x H)	392 (W) x 292 (H) mm
Mounting Type	19" Rackmount
Weight	5.32kgs
Environment Specifications	
Operating Temperature	0~50° C(32~122° F)
Storage Temperature	-20~60 °C (-4~140 °F)
Relative Humidity	10~90% @40 °C Non-condensing, with touch screen
Vibration	1G peak, 5~500Hz (Random)
Shock	15G peak acceleration (11 msec. duration)
Ratings	NEMA 4/IP65 compliant front panel
Certificate	Meet CE/FCC Class A