

Display Monitors



RPAD-717 7 U Rackmount

IP 65 Front Frame with 17" Color TFT Industrial Display Monitor

DESCRIPTION

The RPAD-717 19" Rackmount features an excellent viewing ability for monitoring and control applications. It is available with resistive touch screen that is easy to use and maintain. The front panel of the display monitor is sealed with gasket for NEMA 4/IP 65 rating when it is panel-mounted in a NEMA rated cabinet or enclosure.


FEATURES

- 17" TFT SXGA LCD
- 1280(H)x1024(V), 350 cd/m
- Front Panel NEMA 4/IP 65 rating
- 19" Rackmount Type
- Resistive touch screen (optional)
- DVI, Video or S-Video input (optional)
- Support wide-ranging resolutions from 640x480 to up to 1600 x 1200 with auto phase and auto position



Dimensions

483 (W) x 310 (H) x 70.7 (D) mm

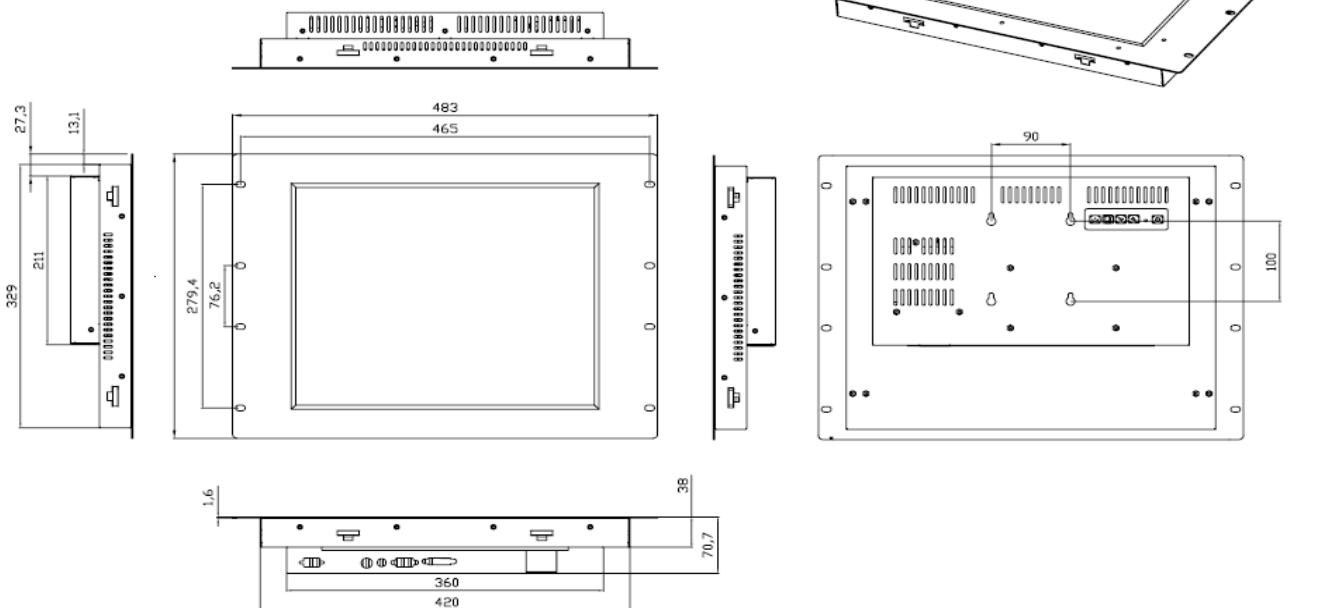

RPAD-717 7 U Rackmount

with 17" Color TFT Industrial Display Monitor

Display Specifications	
Display	17" Color Active TFT Flat Panel Display
Luminance	350 cd/m ²
Viewing Angle	140/130 degrees (H/V)
Resolutions	1280 x 1024 (native mode), 16.2M colors
Backlight Life	50,000 hrs
Touch Screen (optional)	Resistive Touch Screen
OSD Controls/Indicators	Automatic Screen, Setup (OSD), Brightness, Contrast, Horizontal/Vertical Position Image Lock, Color Balance, Video
	Information, Power On and Sync Detection
Internal Power Adapter	Input: 100~240V ± 10% V AC, full ranging Output:+12V DC @5A
Mechanical Specifications	
Construction	Steel chassis & Rackmount front panel
Dimensions	483 (W) x 310 (H) x 70.7 (D) mm
Dimensions Cutout (W x H)	420 (W) x 329 (H) mm
Weight	6.53kgs
Environment Specifications	
Operating Temperature	0~50° C(32~122° F)
Storage Temperature	-20~60 °C (-4~140 °F)
Relative Humidity	10~90% @40 °C Non-condensing, without touch screen
Vibration	1G peak, 5~500Hz (Random)
Shock	15G peak acceleration (11 msec. duration)
Ratings	NEMA 4/IP65 compliant front panel
Certificate	Meet CE/FCC Class A

