

Display Monitors



RPAD-817 19" 8HE Rackmount

IP 65 Front Frame

17" Color TFT Industrial Display Monitor

DESCRIPTION

The RPAD-817 19" Rackmount features an excellent viewing ability for monitoring and control applications

It is available with resistive touch screen that is easy to use and maintain



The front panel of the display monitor is sealed with gasket for NEMA 4/ IP65 when it is panel-mounted in a NEMA rated cabinet or enclosure

FEATURES

- 17" TFT SXGA LCD
- 1280(H)x1024(V), 350 cd/m²
- Front Panel NEMA 4/IP 65 rating
- Rackmount Type
- Resistive or GFG touch screen (optional)
- Optional DVI, Video or S-Video input
- Support wide-ranging resolutions from 640x480 to upto 1600x1200 with auto phase and auto position



Dimensions

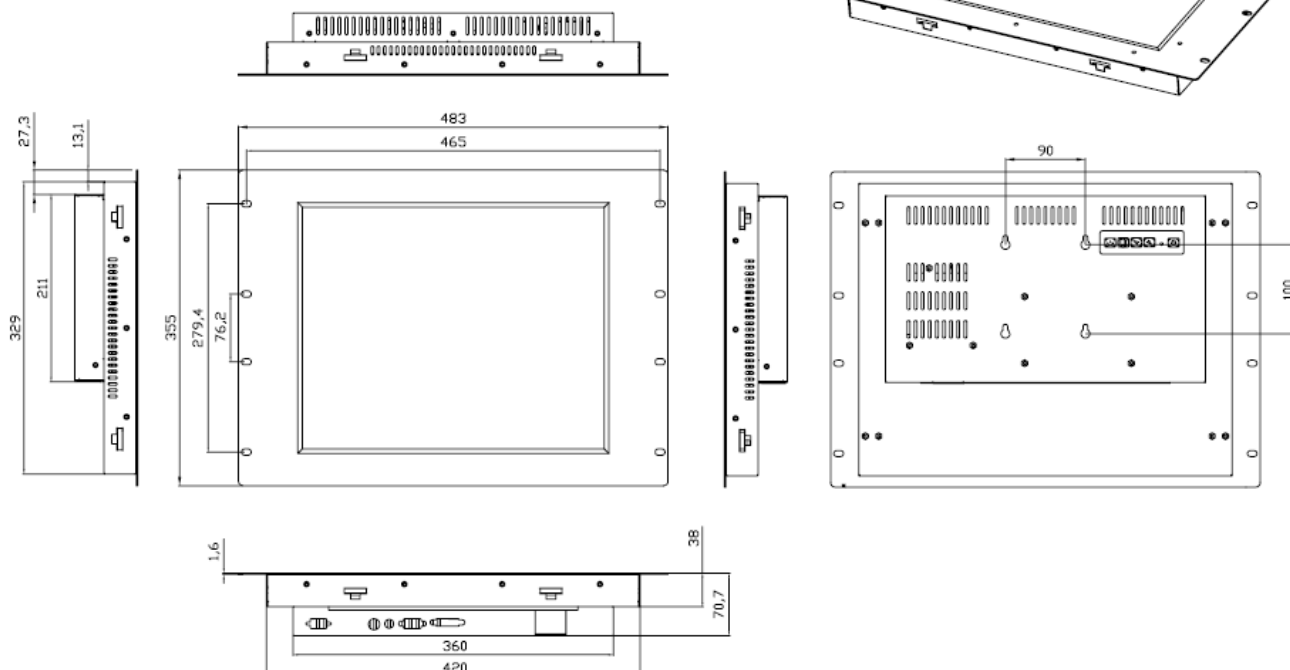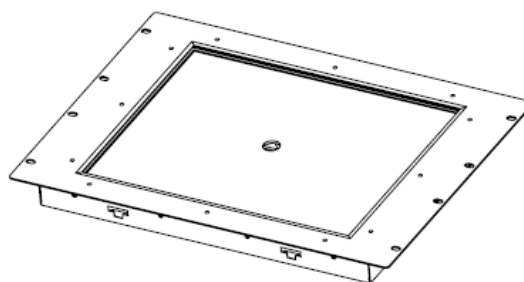

RPAD-817 19" 8HE Rackmount

17" Color TFT Industrial Display Monitor



Display Specifications	
Display	17" Color Active TFT Flat Panel Display
Luminance	300 cd/m ²
Viewing Angle	140/130 degrees (H/V)
Resolutions	1280 x 1024 (native mode), 16.2M colors
Backlight Life	50,000 hrs
Touch Screen (Optional)	Resistive or GFG Touch Screen
OSD Controls/Indicators	Automatic Screen, Setup (OSD), Brightness, Contrast, Horizontal/Vertical Position Image Lock, Color Balance, Video
	Information, Power On and Sync Detection
Internal Power Adapter	Input: 100~240V \pm .10% V AC, full ranging Output:+12V DC @5A
Mechanical Specifications	
Construction	Steel chassis & Rackmount front panel
Dimensions	483 (W) x 355 (H) x 70.7 (D) mm
Dimensions Cutout (W x H)	420 (W) x 329 (H) mm
Weight	6.53kgs
Environment Specifications	
Operating Temperature	0~50° C(32~122° F)
Storage Temperature	-20~60 °C (-4~140 °F)
Relative Humidity	10~90% @40 °C Non-condensing, without touch screen
Vibration	1G peak, 5~500Hz (Random)
Shock	15G peak acceleration (11 msec. duration)
Ratings	NEMA 4/IP65 compliant front panel
Certificate	Meet CE/FCC Class A